



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>A61N 5/06</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 98/22184</b></p> <p>(43) International Publication Date: 28 May 1998 (28.05.98)</p>
<p>(21) International Application Number: PCT/US97/20367</p> <p>(22) International Filing Date: 7 November 1997 (07.11.97)</p> <p>(30) Priority Data:  60/033,333 21 November 1996 (21.11.96) US  08/903,218 22 July 1997 (22.07.97) US</p> <p>(71) Applicant: BOSTON SCIENTIFIC CORPORATION  [US/US]; One Boston Scientific Place, Natick, MA  01760-1537 (US).</p> <p>(72) Inventor: CROWLEY, Robert, J.; 64 Puritan Lane, Sudbury,  MA 01776 (US).</p> <p>(74) Agent: CAPRARO, Joseph, A.; Testa, Hurwitz &amp; Thibault,  LLP, High Street Tower, 125 High Street, Boston, MA  02110 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b>  <i>With international search report.  Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: MUCOSAL ABLATION USING LIGHT</p> <div data-bbox="326 1184 1347 1421" data-label="Image"> </div> <p>(57) Abstract</p> <p>An interventional device uses light to diagnose and treat tissue regions near the surface. A high intensity ultraviolet light is used. The interventional device includes a housing adapted for placement inside a body and a flash lamp placed inside the housing. The flash lamp is capable of generating high intensity ultraviolet light.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## MUCOSAL ABLATION USING LIGHT

Cross-Reference to Related Application

This is based on U.S. provisional patent application serial no. 60/033,333, filed on November 21, 1996.

Technical Field

- 5        This invention relates to ablating tissue, and more particularly, to ablating tissue with an interventional flash lamp device that generates ultraviolet light.

Background Information

- Several cancers start in the mucosal linings of the esophagus, throat, intestine and colon and in the endothelial linings of the uterus, urethra, bladder and other organs, ducts and vessels.
- 10    Barrett's Esophagus is considered to be a pre-malignant condition (e.g., dysplasia or metaplasia) observable as the change in cell structure of the esophagus from normal cells to stomach cells. Progressive columnar cell metaplasia, as shown in Barrett's Esophagus cases, is considered to be a pre-malignant condition that may result in adenocarcinoma. It is currently the opinion of leading practitioners of the endoscopic techniques who diagnose Barrett's esophagus that the etiology of
- 15    the disease involves the repeated exposure of the esophageal tissue to gastric acids (reflux) caused by splashing of the gastric fluids up into the esophagus. Gastro Esophageal Reflux Disease (GERD) is a separate but related condition that allows excessive exposure of the esophagus to stomach acids. Also observable is the effect of ablation or removal of the Barrett's affected portion of the mucosal lining of the esophagus, which generally results in the formation or
- 20    regrowth of a neo-mucosa, which comprises mainly normal esophageal cells.

- Various techniques to destroy only the mucosal linings without excessive damage to the underlying muscularis (i.e., muscle surface) have been attempted. One attempt involves using a high energy ultrasound field to ablate the mucosal linings. There have been claims that cavitation ablation occurs only at the mucosal layer, however these claims have not been
- 25    verified. There are also mechanical interventions such as excision and chemical measures such as light enhanced photodynamic therapy (PDT). Excision is slow and may result in bleeding or perforation, and is therefore costly. PDT may be effective, but clinical trials have not yet proven

its effectiveness. Also, a drug or an agent must be used in conjunction with the light enhanced therapy, which is a disadvantage of PDT.

It would be desirable to be able to ablate or remove the mucosal linings without having to rely on the application of drugs or to resort to a surgical excision. It would be particularly  
5 desirable to provide an ablative energy source that could selectively treat only the mucosal linings and not deeper tissue. It would be even more desirable if the energy from the source could also be selectively applied to the areas where the Barrett's cells are most concentrated for reducing the application of ablative energy to normal cells.

### Summary of the Invention

The invention features an interventional light device for ablating mucosal linings and endothelial linings using high intensity ultraviolet light. The wavelength range of the ultraviolet light permits ablation of tissue near the tissue surface without destroying tissue underneath the surface layer. In addition, the light device may be prepared at low cost, since the device includes an inexpensive flash lamp as the light source.

In one aspect, the invention relates to an interventional light device that includes a flash lamp. The flash lamp is adapted for placement inside a body. The flash lamp is capable of generating high intensity ultraviolet light. Embodiments of this aspect of the invention include the following features. In one embodiment, the flash lamp is a xenon flash lamp and the housing is substantially transparent. In another embodiment, the light device further includes a housing for protecting the flash lamp. The housing includes a lenticular pattern on a surface of the housing to focus or diffuse light generated by the flash lamp. An example of a lenticular pattern, which may be formed on a surface of the housing is a fresnel pattern. In yet another embodiment, the light device is disposed near a distal end of an interventional device such as a balloon catheter, and a fluid is transported to the light device through a lumen of the balloon catheter. The fluid flowing adjacent the flash lamp dissipates heat created by the light device. The distal end of the catheter further includes an aperture to remove some of the fluid from the light device.

In another aspect, the invention relates to a method for illuminating tissue. According to the method, a light device is inserted inside a body near tissue to be illuminated. The light device includes a flash lamp. A power source energizes the light device to generate high intensity ultraviolet light. The generated light illuminates the tissue. In one embodiment, illuminating the tissue comprises ablating mucosal linings or endothelial linings. In another embodiment, the light device is disposed near a distal end of an interventional device such as a catheter, and the interventional device is inserted inside the body. A fluid may be transported to the light device through a lumen of the interventional device. In another embodiment, tissue is first stained to be characterized and the tissue is ablated using light absorbed by the stained tissue. For example, if the tissue is stained blue, the tissue may be ablated by infrared light, whereas if the tissue is stained red, the tissue may be ablated by ultraviolet light.

The foregoing and other objects, aspects, features, and advantages of the invention will become more apparent from the following description and from the claims.

Brief Description of the Drawings

In the drawings, like reference characters generally refer to the same parts throughout the different views. Also, the drawings are not necessarily to scale, emphasis instead generally being placed upon illustrating the principles of the invention.

5        FIG. 1 is a view in partial cross-section of a light device disposed near a distal end of a catheter, parallel to a longitudinal axis of the catheter.

FIG. 2 is a perspective view of a light device attached to a slidable interventional device.

FIG. 3 is a plan view a light device disposed inside a balloon portion of a balloon catheter, parallel to a longitudinal axis of the catheter.

10       FIG. 4 is a schematic diagram of a catheter probe with a light device inserted into a patient to the esophagus through an endoscope.

Description

Referring to FIG. 1, a light device 2 includes a housing 5 and a flash lamp 7 placed inside the housing 5. The housing protects the flash lamp 7 and the surrounding anatomy in case of breakage of the flash lamp 7. The housing 5 is adapted for placement inside a body. A flash lamp 5 is a gaseous discharge lamp that produces an output of light of short duration and high intensity. The flash lamp 7 in the light device 2 is capable of generating high intensity ultraviolet light. Various flash lamps can be used successfully in accordance with the invention. In a preferred embodiment, the flash lamp is a xenon flash lamp.

The light device 2 is disposed near a distal end of an interventional device 1. As shown in FIG. 1, the light device 2 is disposed near a distal end of a catheter probe 1. The catheter probe 1 includes a catheter body 3, and the body 3 includes one or more lumens 4. The catheter body 3 is typically made of a single or multi-lumen plastic extrusion of a flexible, resinous and biocompatible material such as nylon, polyethylene or PET. The housing 5 of the light device 2 is at least partially transparent to light. Examples of materials suitable to form the transparent housing 5 include, but are not limited to, polystyrene, polyethylene, and quartz glass. In one embodiment, the housing is attached to the catheter body 3 with an adhesive. In another embodiment, the housing 5 is an extension of the catheter body 3, where the material for the catheter body 3 is optically transparent to light waves. In still another embodiment, lenticular or fresnel patterns 6 may be embossed or molded on either surface of the housing 5 to focus or diffuse the light energy generated by the flash lamp 7. In the embodiment of FIG. 1, the flash lamp 7 is secured and centered inside the housing 5 by a friction ring 11.

The light device 2 also includes a pair of leads 13 extending from a voltage source (not shown) to the flash lamp 7. The leads deliver voltage to opposite ends of the flash lamp 7 to cause the flash lamp 7 to generate light. In one embodiment, the leads 13 are connected to a transformer 9, which serves as a voltage step up system for power supplied. Construction of a transformer 9 is well known in the art. The transformer 9, for example, may be constructed by winding a copper wire around a form and tapping the coil at various points to obtain a step up or step down transformer function. In a preferred embodiment, the transformer 9 has a diameter of less than about 0.125 inches. A small transformer 9 may be used with the light device 2, because the flash light 5 generates light waves with only short duration. When the transformer 9 is placed inside the lumen 4 of the catheter body 3, the transformer 9 may be cooled by surrounding the transformer 9 with a fluid flowing inside the lumen 4. In another embodiment, leads 13 deliver

voltage to the flash light 7 without the transformer 9. For example, small copper wires may be used as the leads 13 so long as the copper wires are insulated sufficiently to prevent arcing. For a 30 gage copper wire, a polytetrafluoroethylene (PTFE) extruded insulation with about 0.001 inch thickness may be suitable.

5 Still referring to FIG. 1, a third lead 17 is in communication with the flash lamp 7. The third lead 17 is carried through the catheter body 3 and terminates where the lead 17 contacts a small piece of copper foil 19 disposed adjacent a surface of the flash lamp 7. The copper foil 19 aids in the firing of the flash light 7 by providing a higher trigger voltage. In an alternative embodiment, in place of a separate lead 17, a thin layer or strip of metalization is deposited on the  
10 catheter body 3 and, in place of the copper foil 19, a portion of a surface of the flash lamp 7 is metalized. The metalization on the flash lamp 7 may act as an efficient reflector, redirecting some of the light energy as the operator may desire. A proximal connector 21 located at a proximal end of the catheter 1 provides terminals for leads 13, 17. The proximal connector 21 is in communication with a mating connector for empowering the light device 2. In a preferred  
15 embodiment, the connector 21 is a swivel connector that allows the operator to torque the catheter 1 without hindrance.

Referring to FIG. 2, a light device 25 including a transformer is disposed at a distal end of a slidable interventional device 23. The slidable interventional device 23 has an elastic tubing 24 with a length of about 200 cm. In the disclosed embodiment, the outside diameter of the light  
20 device 25 is about 0.089 inches, the outside diameter of the elastic tubing 24 is about 0.040 inches, and the inside diameter is about 0.025 inches. The elastic tubing may be a super-elastic metal such as nitinol. The proximal connector 27 disposed at a proximal end of the interventional device 23 employs a sliding stop 29. The slidable stop 29 is capable of sliding along the length of the interventional device 23 to control the depth of insertion of the interventional device 23 inside  
25 a body. Examples of other materials suitable to form the elastic tubing 24 include, but are not limited to plastic, stainless steel, and composite fiber.

Referring to FIG. 3, the slidable interventional device 23 and the light device 25 of FIG. 2 are inserted inside a catheter 31. The body of the catheter 33 may be made of, for example, a flexible plastic material that is transparent to light. In the embodiment disclosed in FIG. 3, a  
30 balloon 34 is disposed over the catheter body 33 to provide a space between the flash lamp 7 and tissue to be illuminated. The space provided by the balloon 34 may prevent the tissue from burning. In one embodiment, a fluid is transported through a lumen 36 to the balloon 34 to inflate



the balloon 34. Examples of fluids sufficient to inflate the balloon 34 include, but are not limited to, air, water, saline, and radiographic contrast fluid.

The fluid performs an additional function of dissipating heat generated by the flash lamp 7. Higher outputs from the flash lamp 7 are obtainable if waste heat is efficiently removed from the flash lamp 7. Passage of the fluid across the surface of the flash lamp 7 may conveniently remove the waste heat. The catheter 31 further includes an aperture 39 located at the distal end of the catheter 31. In one embodiment, the aperture 39 allows a small amount of the heat dissipating fluid to flow through the catheter 31 past the flash light 7, and to leave the catheter 31 as a way of dissipating heat. In an alternative embodiment, the fluid is re-circulated to and away from the flash light 7 to dissipate heat. However, it has been found that simply surrounding the flash lamp 7 with a cooling fluid is sufficient to reduce heat buildup, thereby allowing higher flash power, flash duration and repetition rate. Repetition rates exceeding about 10 Hz are possible with adequate cooling of the flash lamp 7. The pressure of the cooling fluid may be regulated by a syringe external to a patient. Temperature measurements of the cooling fluid may be taken.

Referring to FIG. 4, the light device 25 and the balloon catheter 31 of FIG. 3 are introduced inside an esophagus 42 of a patient through an endoscope 40. The catheter 31 is first prepared by placing the slidable interventional device 23 and the light assembly 25 shown in FIG. 2 inside the catheter 31. The catheter 31 is then introduced inside the body and placed near tissue to be illuminated through the endoscope 40. At this time, a small amount of fluid may be introduced through a luer fitting 41 to wet the catheter and to expel air bubbles from the balloon. A proximal seal 43 located at the proximal end of the catheter 31 prevents fluid from exiting the catheter 31 past the proximal connector 21, where it might cause a short circuit. The proximal connector 21 is connected to the system connector 45, which mates with and receives the proximal connector 21. The system connector 45 is in communication with a control unit 47. The control unit supplies power to the flash lamp 7 when actuated by a foot switch 49. In one embodiment, the control unit 47 includes a capacitor charging circuit and discharging circuit as commonly found in photo flash applications and one or more batteries. In an alternative embodiment, the control unit 47 is equipped with a power supply that is connected to a main outlet through an isolation transformer.

The light device of the invention may be used to illuminate tissue inside a body to serve any number of purposes. In operation, the light device 2 is inserted inside a body near tissue to be

illuminated. The light device is then energized with an external power source to generate high intensity ultraviolet light. The tissue is illuminated by applying the generated light to the tissue.

In one embodiment, the light device performs ablation of mucosal linings. Application of high intensity ultraviolet light ablates mucosal linings without damaging tissue underneath the  
5 linings such as the muscularis, because ultraviolet component of the light is greatly attenuated by tissue. Ultraviolet light is absorbed through only a short distance before it is converted to heat. Therefore, ultraviolet light is particularly effective in destroying the top-most layer of cells, which is the target in ablation of mucosal linings.

In a preferred embodiment, the ablation procedure is carried out by selectively applying  
10 the ablative energy to diseased tissue regions only. Tissue under suspicion may be characterized visually, electronically, or optically before being ablated. For example, it is well known that Barrett's esophagus appears pinkish in color and normal esophageal tissue appears whitish in color. The ablation procedure may be carried out using this chromatic or spectral change as a guide. For example, an endoscope 40 is first inserted inside a patient to identify, through a color  
15 change, the region of the esophagus that is affected with Barrett's disease. Once the diseased tissue region is identified, a catheter 31 having a light device 2 at the distal end is introduced inside the body through the working channel of the endoscope 40, and appropriately positioned under endoscopic guidance to ablate the diseased tissue. The light device 2 is then energized by an external power supply, and the generated light is applied to a selected region of the body to  
20 ablate.

Application of a dye may further enhance the color differences between normal and diseased tissue. In one embodiment, the dye may be sprayed to suspicious tissue under pressure through an aperture 39 located at the distal end of an interventional device as shown in FIG. 3. The fact that some dyes may be more absorptive in certain regions of the spectrum and also have  
25 a greater affinity to the diseased or normal portions of the tissue may be used for selectively ablating only the diseased tissue. For example, an indigo carmine dye is sprayed onto an area having both diseased and normal tissue. The indigo carmine 0.08% dye, which is blue or violet in color, reflects ultraviolet radiation. The indigo carmine dye also has an affinity for metaplastic tissue, and thus stains the metaplastic tissue to a greater degree and stains the normal tissue to a  
30 lesser degree. Therefore, when the light wave energy is applied to tissue stained with the indigo carmine dye, the tissue selectively admits the red, infrared or "heat" energy to a greater degree in the diseased tissue, where it may have a therapeutic effect, but tends to leave the normal tissue

relatively unchanged. Alternatively if it is preferred that the diseased tissue absorb the ultraviolet portion of the spectrum, then a red-reflecting dye may be used to stain the tissue under investigation. Any color agent which possesses properties described above may be employed in accordance with the invention. As an alternative embodiment, the flash lamp 7 may be coated with a color filter to attenuate the non-ultraviolet portion of the light output from the flash lamp 7.

The use of a flash lamp 7 or other source of high intensity ultraviolet light energy placed in close proximity to tissue region of interest eliminates the need for lasers and light guides. Laser systems are not ideal since light guides tend to attenuate the ultraviolet region of the spectrum and laser systems require very expensive support electronics.

The invention can use ordinary flash electronics such as those found in disposable flash-equipped film cameras, and thus the entire power unit may be discarded after use in an economical manner. The present light device is capable of generating high intensity light in the ultraviolet region, in addition to the visible and infrared regions of the light spectrum. The generated light is applied to various parts of a body for multiple purposes including ablating tissue, heating, crosslinking, activating a drug introduced near the tissue, and/or observing a spectral response of tissue. Some apparatus and methods for observing spectral responses of tissue are disclosed in commonly-owned U.S. provisional patent application serial no. 60/033,334, the entirety of which is hereby incorporated herein by reference. Other ultraviolet light sources and methods of using ultraviolet light for diagnostic and therapeutic purposes are described in a commonly-owned U.S. provisional patent application serial no. 60/033,335, the entirety of which is hereby incorporated herein by reference.

Although the light device of the invention has been described thus far in conjunction with catheters and endoscopes, other interventional devices such as guide wires, stents, needles, and trocars may be used to introduce the light device inside a body near tissue to be illuminated, so long as the interventional device has an inside diameter sufficient to accept the light device and has an aperture, a port or a window for transmitting the generated light. The interventional device may be operated by a physician who physically manipulates the device and activates the energy source or remotely controls it under visual guidance and with electronic remote control of the device. In accordance with the invention, the light device may be placed near tissue to be illuminated or actually contact the tissue, such that selected areas of the tissue may burn as a result of the application of the ablation energy. In addition, the light energy may be applied to

tissue over a long period of time (for example, longer than a few seconds) such that exposure to radiation is built up over time. The light device may be implanted inside a body for the treatment of tumors that may require prolonged exposure to light.

Variations, modifications, and other implementations of what is described herein will occur to those of ordinary skill in the art without departing from the spirit and the scope of the invention as claimed. Accordingly, the invention is to be defined not by the preceding illustrative description but instead by the spirit and scope of the following claims.

What is claimed is:

Claims

- 1           1. A light device, comprising:  
2           a flash lamp for generating high intensity ultraviolet light adapted for placement inside a  
3           body.
- 1           2. The device of claim 1 wherein the flash lamp is a xenon flash lamp.
- 1           3. The device of claim 1 further comprising a substantially transparent housing.
- 1           4. The device of claim 3 wherein the housing includes a lenticular pattern on a surface of  
2           the housing to focus or diffuse light generated by the flash lamp.
- 1           5. The device of claim 4 wherein the lenticular pattern is a fresnel pattern.
- 1           6. The device of claim 1 further comprising an transformer in electrical communication  
2           with the flash lamp.
- 1           7. The device of claim 1 further comprising an interventional device, wherein the flash  
2           lamp is disposed near a distal end of the interventional device.
- 1           8. The device of claim 7 wherein the interventional device is a balloon catheter and the  
2           flash lamp is disposed inside a balloon portion of the catheter.
- 1           9. The device of claim 8 wherein the balloon catheter has a lumen for transporting a fluid  
2           to the balloon portion.
- 1           10. The device of claim 9 wherein the balloon catheter has an aperture at distal end of the  
2           catheter for removing the fluid.
- 1           11. The device of claim 7 wherein the interventional device has a sliding stop disposed at  
2           a proximal end of the intervention device for controlling depth of insertion of the interventional  
3           device.
- 1           12. The device of claim 7 wherein the interventional device has a filter disposed near the  
2           distal end of the interventional device for attenuating non-ultraviolet light generated by the flash  
3           lamp.
- 1           13. The device of claim 7 further comprising a control unit in communication with the  
2           flash lamp.

1 14. A method for illuminating tissue, comprising:

- 2 a) providing a light device comprising a flash lamp;  
3 b) inserting the light device inside a body near tissue to be illuminated;  
4 c) energizing the light device to generate high intensity ultraviolet light; and  
5 d) illuminating the tissue by applying the generated light to the tissue.

1 15. The method of claim 14 wherein illuminating the tissue comprises ablating a mucosal  
2 lining of an esophagus.

1 16. The method of claim 14 wherein illuminating the tissue comprises ablating a mucosal  
2 lining of a throat.

1 17. The method of claim 14 wherein illuminating the tissue comprises ablating a mucosal  
2 lining of an intestine.

1 18. The method of claim 14 wherein illuminating the tissue comprises ablating a mucosal  
2 lining of a colon.

1 19. The method of claim 14 wherein illuminating the tissue comprises ablating an  
2 endothelial lining of a uterus.

1 20. The method of claim 14 wherein illuminating the tissue comprises ablating an  
2 endothelial lining of a urethra.

1 21. The method of claim 14 wherein illuminating the tissue comprises ablating an  
2 endothelial lining of a bladder.

1 22. The method of claim 14 wherein illuminating the tissue comprises ablating an  
2 endothelial lining of an organ.

1 23. The method of claim 14 wherein illuminating the tissue comprises ablating an  
2 endothelial lining of a duct.

1 24. The method of claim 14 wherein illuminating the tissue comprises ablating an  
2 endothelial lining of a vessel.

1 25. The method of claim 14 further comprising disposing the light device at a distal end of  
2 an interventional device and inserting the interventional device inside a body near tissue to be  
3 illuminated.

1           26. The method of claim 25 further comprising transporting a fluid to the light device to  
2       dissipate heat generated by the light device.

1           27. The method of claim 14 further comprising characterizing the tissue by transporting a  
2       dye to the tissue to stain the tissue and wherein illuminating the tissue comprises ablating the  
3       tissue using light absorbed by the stained tissue.

1           28. The method of claim 14 further comprising introducing a drug near the tissue and  
2       activating the drug through illumination.

1/2

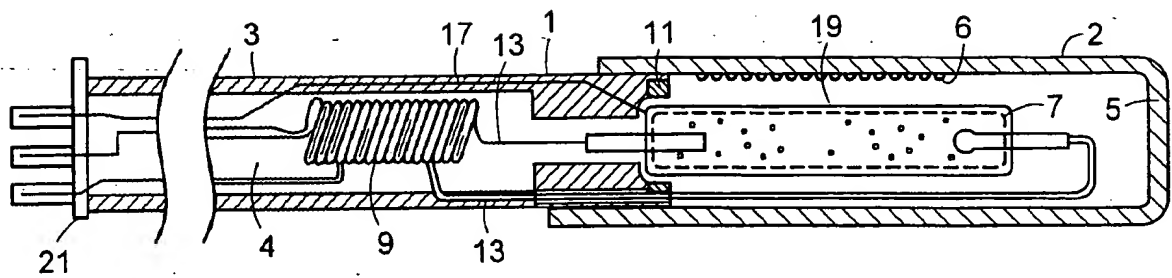


FIG. 1

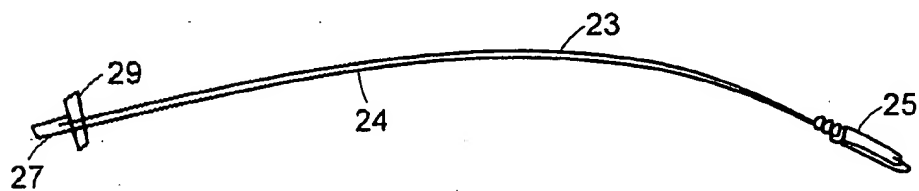


FIG. 2

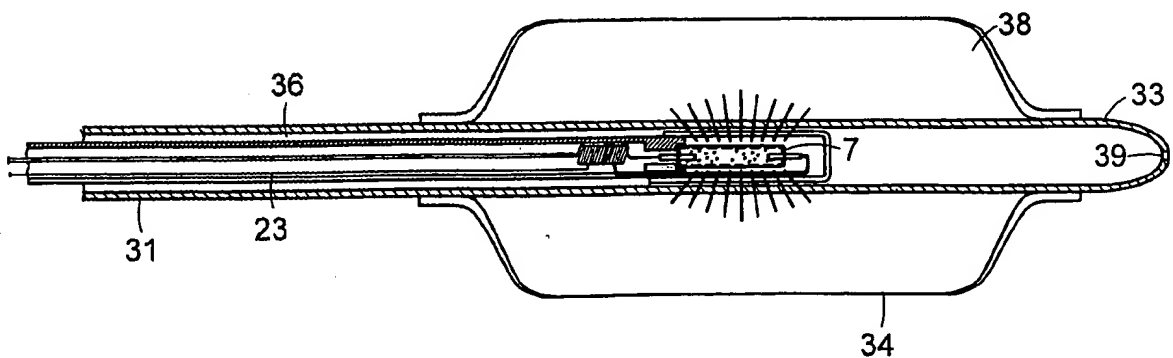


FIG. 3



2/2

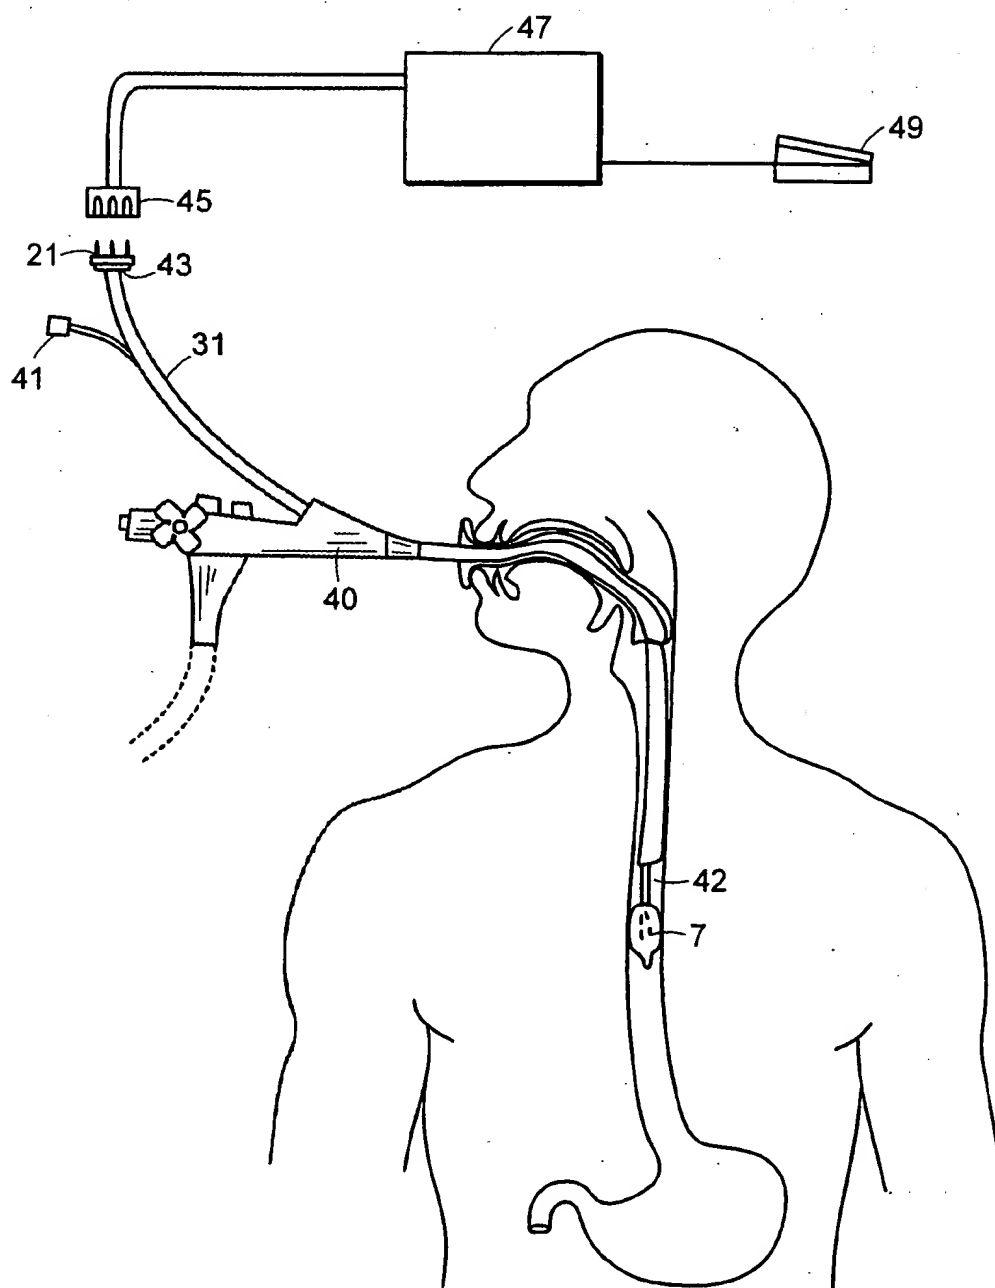


FIG. 4

SUBSTITUTE SHEET (RULE 26)

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 97/20367

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 A61N5/06

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 A61N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 30 23 130 A (H. VON BLÜCHER AND H. VON BLÜCHER) 21 January 1982 see page 3, line 9 - line 10; claims 1,3 ---	1,7,14, 25
Y	DE 888 727 C (QUARZLAMPEN) 3 September 1953  see the whole document ---	1-3, 6-10,13, 14,25,26
Y	EP 0 629 380 A (ANGIOMEDICS II) 21 December 1994  see page 3, line 3 - line 15 see page 3, line 28 - line 34 ---	1-3, 6-10,13, 14,25,26
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

18 March 1998

Date of mailing of the international search report

26.03.98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Nice, P

# INTERNATIONAL SEARCH REPORT

Internal Application No

PCT/US 97/20367

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 195 12 518 A (A.FUJISHIMA ET AL.) 5 October 1995 see abstract see column 2, line 6 ---	1,2,12, 14
A	WO 96 07451 A (RARE EARTH MEDICAL) 14 March 1996 see page 5, line 5 - line 15 see page 6, line 20 - line 21 see page 7, line 20 - line 21 -----	1,4,11, 14,25

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 97/20367

## Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 15-24, 27-28  
because they relate to subject matter not required to be searched by this Authority, namely:  
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by therapy
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/20367

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3023130 A	21-01-82	NONE	
DE 888727 C		NONE	
EP 0629380 A	21-12-94	US 5053033 A	01-10-91
		AT 119403 T	15-03-95
		AU 669833 B	20-06-96
		AU 1655995 A	03-08-95
		AU 655939 B	19-01-95
		AU 8546491 A	20-05-92
		CA 2092537 A	11-04-92
		DE 69108041 D	13-04-95
		DE 69108041 T	19-10-95
		EP 0552189 A	28-07-93
		ES 2073172 T	01-08-95
		JP 6501859 T	03-03-94
		WO 9206741 A	30-04-92
DE 19512518 A	05-10-95	JP 7275380 A	24-10-95
		FR 2718037 A	06-10-95
		GB 2288123 A,B	11-10-95
WO 9607451 A	14-03-96	US 5632767 A	27-05-97
		US 5643253 A	01-07-97
		US 5637877 A	10-06-97
		AU 3626995 A	27-03-96
		CA 2199384 A	14-03-96
		EP 0781154 A	02-07-97